

FUSO CANTER

CANTER 515 PANTECH

4X2 / WIDE CAB / DUONIC DCT



**OUR SAFEST CANTER EVER WITH AEB, LDWS AND ESP STANDARD.
CLASS LEADING 30,000KM SERVICE INTERVALS.
FRP OR LIGHTWEIGHT HONEYCOMB BODY OPTIONS.**

GVM

4,495_{KG}

GCM

7,995_{KG}

Power/Torque

110_{kW} / 370_{Nm}

- Can be driven on a passenger car license.
- Actual product may vary from image shown.

CANTER SPECIFICATIONS

MODEL

A	4X2 515 BUILT READY WIDE CAB FRP PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP5
B	4X2 515 BUILT READY WIDE CAB HONEYCOMB PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP6

WHEEL BASE

3400mm
3400mm


GVM (optional)

4,495kg
4,495kg

GCM (optional)

7,995kg
7,995kg

Engine	
Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled, 13.7L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 - Euro 5

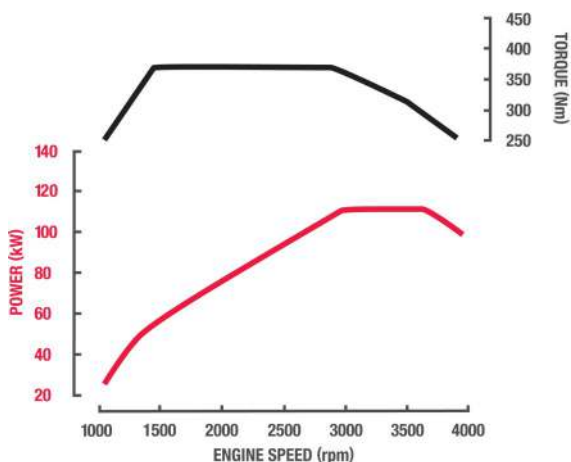

Fuel	
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of capacity

Cooling	
Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

Electrical	
Voltage	12V Negative Earth
Battery Capacity	2x12V, 70Ah/5hr
Battery Specification	115D31L x2
Headlamp Type	LED
Body Builder Harness	Yes

Clutch	
Clutch Model	Duonic Automated Manual (no clutch pedal)
Type	Dual Clutch (Wet Multi-plate)

Transmission	
Version	FUSO DUONIC M038S6
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474 5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side

Front Axle	
Axle Version	FUSO F200T
Type	Independent Front Suspension
Capacity *	2300kg
Notes	*See MAX LOADING for vehicle capacity.

Front Suspension	
Type	Double Wishbone Independent Front Suspension with Coil Springs and Shock Absorbers

Rear Axle	
Type	Full Floating Banjo Type
Axle Version	FUSO R030T
Capacity *	3800kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

Rear Suspension	
Type	Steel Suspension
Details	Parabolic Leaf with Shock Absorbers
Size Main Leaves	1100x70mm

Max Loading	
Front	2180kg
Rear	3800kg
Total	4495kg

Steering	
Type	Rack & Pinion
Steering Column	Tilt/Telescopic Adjustable
Power Assist	Standard

Brakes	
Type	Hydraulic Dual Circuit with Front and Rear Discs
Size Front	219x28mm
Size Rear	219x28mm
Features	ABS plus EBD (Electronic Brake Distribution) Active Emergency Braking System (AEBS) Electronic Stability Program (ESP) Exhaust Brake Electronic Brake Wear Sensors
Park Brake	Transmission Mounted

Wheels & Tyres	
Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided

CANTER SPECIFICATIONS

MODEL

A	4X2 515 BUILT READY WIDE CAB FRP PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP5
B	4X2 515 BUILT READY WIDE CAB HONEYCOMB PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP6

WHEEL BASE

3400mm
3400mm

GVM (optional)

4,495kg
4,495kg

GCM (optional)

7,995kg
7,995kg

Chassis

Type	Reinforced Tapered Channel
Size	188x60x4mm
Width	748mm
Tensile Strength	540Mpa

Instruments

Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters

Multi-Media Package

Satellite Navigation	GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included.
Colour Display	8" LCD with capacitive touch screen control
Phone Connectivity	Wireless Apple Carplay & Android Auto Compatible
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB
Camera Compatibility	1 Reverse Camera fitted as standard Display can accept up to 5 additional cameras#
Notes	# Cameras available through spare parts

Standard Features

Airbag(s)	Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger)
Active Safety Features	ABS plus Electronic Brake force Distribution (EBD) Advanced Emergency Braking (AEBS) Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS)
Cruise Control	Yes
Hill Start System	Yes
Cab Cooling & Heating	Air Conditioner / Heater / Demister
Accessory Power	12V Accessory Power Outlet / Cigar Lighter
Driving	Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders 2 3 seats
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks
Cab: External	Front End-Outline Marker Lamps Door Side Impact Beams
Chassis	Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup

Cab Features

Type	All Steel Forward Control Manual Tilt
Cab Structure	ECE-R29 European Cab Strength Approved
Mounting	Hydroelastic 4 Point
Additional Engine Access	Removable Engine Access Panel
Colour	Natural White
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Rear Vision Mirrors	2 x External Convex (ECE 46) - Heated
Seating Capacity	3
Seat Belts	Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat Driver Seat Belt Warning
Seat (driver)	Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support
Seats (passenger)	Flat Folding, 2 Passenger Bench

Service Intervals

Interval*	TBA
-----------	-----

Warranty*

Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years
Body	1 Year/Unlimited kms
Notes	* Please refer to Fuso Owners Warranty Booklet for additional terms and conditions.

Performance

Turning Circle (kerb to kerb - metres)	11.0
Road Speed (km/h) at Max Engine Speed	136
Engine Speed (rpm) at 100km/hr (top gear)	2346
Gradeability at Rated GVM (theoretical)*	45.5%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions

Mass estimated*

Front*	A 1585kg	B TBA
Rear*	A 1885kg	B TBA
Total*	A 3470kg	B TBA
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)	

Dimensions mm

WFF (Width Front Fender) (mm)	1995
WRA (Width Rear Axle) (mm)	1929
WRT (Width Rear Track) (mm)	1495
Width Frame (mm)	748

Body Builder's Notes

CANTER SPECIFICATIONS

MODEL

- A 4X2 515 BUILT READY WIDE CAB FRP PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP5
- B 4X2 515 BUILT READY WIDE CAB HONEYCOMB PAN MWB 6 SP. DUONIC AMT FEB21ER3SFBL-BP6

WHEEL BASE

3400mm
3400mm

GVM (optional)

4,495kg
4,495kg

GCM (optional)

7,995kg
7,995kg

Built Ready

Features

- | | |
|--|--|
| <p>A</p> <ul style="list-style-type: none"> • 20mm White FRP Side and Wall Panels • One Piece Aluminum Roof Sheet • External Stainless Polished Extrusions • 3mm Steel Chequerplate Floor Exposed Chequer Up • 190mm High Internal Kick Panels • Internal Light with in cab switch • Internal Square Tube Tie Rails fixed to Panel Walls • Double Rear Doors with Three Hinges kerb side opens first • Fixed Grab Handles on Rear Pillars • Rear under-run bar to suit tailgate with steps and light protection frames • Tailgate: DH-RP.10 750kgs Capacity Dhollandia Tuckaway Tailgate | <p>B</p> <ul style="list-style-type: none"> • 20mm White Honeycomb Side and Wall Panels • One Piece Aluminum Roof Sheet • External Stainless Polished Extrusions • 3mm Steel Chequerplate Floor Exposed Chequer Up • 190mm High Internal Kick Panels • Internal Light with in cab switch • Internal Square Tube Tie Rails fixed to Panel Walls • Double Rear Doors with Three Hinges kerb side opens first • Fixed Grab Handles on Rear Pillars • Rear under-run bar to suit tailgate with steps and light protection frames • Tailgate: DH-RP.10 750kgs Capacity Dhollandia Tuckaway Tailgate |
|--|--|

Length (mm)	4320
Width (mm)	2185
Height (mm)	2135
Overall Unit Length (mm)	6335



Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Valid from 02-Apr-24.