



# FIGHTER

Fighter 1124 Euro 6.

4x2 / 6-SP MANUAL / STEEL SUSP.



**OUR SAFEST FIGHTER YET WITH ACTIVE MITIGATION BRAKE, LANE DEPARTURE WARNING SYSTEM, ELECTRONIC STABILITY PROGRAM AND ACTIVE SIDEGUARD ASSIST AS STANDARD.**

**GVM**

**11,000<sub>KG</sub>**

**GCM**

**14,500<sub>KG</sub>**

**Power/Torque**

**177<sub>KW</sub> / 745<sub>NM</sub>**

- Medium rigid licence required.
- Actual vehicle may differ from above image

# FIGHTER SPECIFICATIONS

## MODEL

A	4X2 1124 STEEL SUSP. SWB 6 SP. MAN - FK62FHY5RFAC
B	4X2 1124 STEEL SUSP. MWB 6 SP. MAN - FK62FKY5RFAC
C	4X2 1124 STEEL SUSP. LWB 6 SP. MAN - FK62FLY5RFAC
D	4X2 1124 STEEL SUSP. XLWB 6 SP. MAN - FK62FMY5RFAC

## WHEEL BASE

4270mm
4870mm
5210mm
5540mm


## GVM

11,000kg
11,000kg
11,000kg
11,000kg

## GCM

14,500kg
14,500kg
14,500kg
14,500kg

Engine	
Engine Version	FUSO 6M60-CAT5 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Type	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7545cc)
Bore	118mm
Stroke	115mm
Power (ECE R85-00)	177kW @ 2270 rpm
Torque (ECE R85-00)	745Nm @ 950-2270 rpm
Maximum Engine Speed	2900 rpm
Compression Ratio	16.0:1
Cooling System / Oil Cooler	Water cooled, 23.0L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Mounted Underbody (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Gas Recirculation (EGR) Selective Catalytic Reduction (SCR)
Emission Level	ADR 80/04 - Euro VI

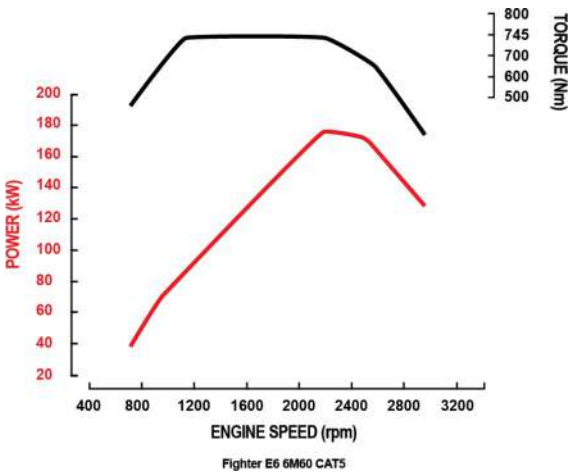

Fuel	
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	200 Litres
AdBlue Exhaust Fluid Capacity	23 Litres
Notes	*Max Fill to approx 95% of capacity

Cooling	
Fan Drive	Electronically controlled (Viscous)
Radiator	Corrugated Fin with Expansion Tank

Electrical	
Voltage	24V Negative Earth
Battery Capacity	2x12V, 80Ah/5hr
Battery Specification	95E41R X2
Headlamp Type	Halogen
Headlamp Capacity	Low beam 2x70W High beam 2x70W
Fog Light	Halogen

Clutch	
Clutch Model	FUSO C7M38
Type	Single Plate
Operation/Specification	Air Assisted Hydraulic

Transmission	
Version	FUSO Manual M070S6-OD
Type/Speeds	6 with Air Assisted Gearshift
Features	Synchromesh 2nd-6th
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504 5th: 1.000 6th: 0.774 Rev. 6.807
PTO Opening	LH Side

Propeller Shaft	
Type	P10
Universal Joint	Needle Roller

Front Axle	
Axle Version	FUSO F500T
Type	Reverse Elliot 'I' Beam
Capacity *	5000kg
Notes	*See MAX LOADING for vehicle capacity.

Front Suspension	
Type	Long Taper Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size	1300x70mm Leaves

Rear Axle	
Type	Full Floating Banjo Type
Axle Version	FUSO R052T
Capacity*	9500kg
Ratio	4.625:1
Notes	*See MAX LOADING for vehicle capacity.

Rear Suspension	
Type	Steel Suspension
Details	Semi-Elliptic Leaf with Stabiliser Bar
Size Main Leaves	1300x70mm
Size Helper Leaves	900x70mm

Max Loading	
Front	4480kg
Rear	8480kg
Total	11000kg

Options	
Options	R64: Limited Slip Differential FK62FHY

Steering	
Type	Integral Power Assisted Ball and Nut
Steering Column	Tilt/Telescopic Adjustable

Brakes	
Type	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake adjustment, ABS
Size Front	370x150mm
Size Rear	370x150mm
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cyl.

# FIGHTER SPECIFICATIONS

## MODEL

A	4X2 1124 STEEL SUSP. SWB 6 SP. MAN - FK62FHY5RFAC
B	4X2 1124 STEEL SUSP. MWB 6 SP. MAN - FK62FKY5RFAC
C	4X2 1124 STEEL SUSP. LWB 6 SP. MAN - FK62FLY5RFAC
D	4X2 1124 STEEL SUSP. XLWB 6 SP. MAN - FK62FMY5RFAC

## WHEEL BASE

4270mm
4870mm
5210mm
5540mm

## GVM

11,000kg
11,000kg
11,000kg
11,000kg

## GCM

14,500kg
14,500kg
14,500kg
14,500kg

## Wheels & Tyres

Wheel Type	7 x Single Piece Steel Disc Including Spare
Wheel Size	19.5x6.75DC-147-12t
Wheel Stud Pattern	8x275mm PCD
Tyre Size All	245/70R19.5 136/134
Spare Tyre Carrier	Provided

## Chassis

Type	Parallel Channel
Size	228x80x7.0mm
Width	842mm
Tensile Strength	540 MPa

## Instruments

Gauges	Speedometer
	Tachometer
	Fuel Level
	Air Pressure
	AdBlue Level
Colour Information Display	Odometer
	Tripmeter (x2)
	Hour Meter (x2)
	Outside Temperature
	AdBlue Level
	DPF Information
	Driving Range (Fuel and AdBlue)
	Current Vehicle Speed
	Cruise Control
	Lane Departure Warning
	Attention Assist Warning
	Alarm Clock
	Level Control
	Service Indicator & Reminder System
	Air Pressure
Coolant Temperature	
Engine Oil Level & Running Time	

## Multi-Media Package

Satellite Navigation	GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included.
Colour Display	8" LCD with capacitive touch screen control
Phone Connectivity	Wireless Apple Carplay & Android Auto Compatible
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB
Internal Storage Capacity	64GB
Camera Compatibility	1 Reverse Camera fitted as standard Display can accept up to 5 additional cameras#
Notes	# Cameras available through spare parts

## Active Safety

Safety Systems	AMB plus - Active Mitigation Brake
	ESP - Electronic Stability Program
	AA - Attention Assist
	ASA - Active Sideguard Assist
	LDWS - Lane Departure Warning System
Reverse Warning	ABS - Anti-lock Braking System
	DRL - Daytime Running Lamps
	Wide Dynamic Range Camera and Buzzer
Notes	Active Safety Systems primary function is to provide driver assistance to increase road safety in events of driver inattentiveness. These systems do not allow for lack of attention whilst driving and should not replace safe and alert driving.

## Passive Safety

Airbags	SRS Airbag - Driver
Seat Belts	Driver Seat Belt Pre-tensioner

## Service Intervals

Interval*	20,000km or 12 Months whichever occurs first
-----------	--

## Warranty\*

Basic/Powertrain	5 Years or 300,000kms (whichever occurs first)
------------------	--

## Performance

Turning Circle (kerb to kerb - metres)	A	B	C	D
	15.2	17.2	18.2	19.4

Gradeability at Rated GVM (theoretical)*	51%
--	-----

Notes \*This is theoretical performance only. Actual performance may vary under different conditions

## Mass estimated\*

Front*	A	B	C	D
	2380kg	2365kg	2395kg	2405kg
Rear*	A	B	C D	
	1490kg	1510kg	1555kg	
Total*	A	B	C	D
	3870kg	3875kg	3950kg	3960kg

Notes \* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)

## Dimensions mm

WFF (Width Front Fender) (mm)	2170			
WRA (Width Rear Axle) (mm)	2255			
WFT (Width Front Track) (mm)	1780			
WRT (Width Rear Track) (mm)	1710			
Width Frame (mm)	842			
A - Length Overall (mm)	A	B	C	D
	7220	8095	8645	9075
C - Front Overhang (mm)	1135			
D - Wheelbase (mm)	A	B	C	D
	4270	4870	5210	5540
G - Front Axle to Rear of Cab (mm)	855			
H - Rear of Cab to Rearmost Item Behind Cab (mm)	75			
I - Rearmost Item Behind Cab to Rear Axle (mm)	A	B	C	D
	3340	3940	4280	4610
J - Frame, Rear Axle to End (mm)	A	B	C	D
	1815	2090	2300	2400
P - Height Cab to Ground (mm)	2480			
R - Height Rear Frame to Ground (mm)	A	B C D		
	918	917		

## Body Builder's Notes

Notes	Chassis reinforcement must be utilised for Tipper/ Demountable type body configurations. To conform with ADR 13/00 and 14/03 (lighting/mirror requirements) the following must be adhered to at body installation. - If other than a flat type or tipper body is fitted, rear end out-line marker lamps must be installed. - If overall length exceeds 6.0 metres, side reflectors must be installed. - If overall length exceeds 7.5 metres, side marker lamps must be installed. - If overall width is less than 2.4 metres, the mirrors must be modified to project not more than 230mm. To conform with ADR 42/05 (General Safety), rear wheel guards must be fitted to the vehicle.
-------	--


# FIGHTER SPECIFICATIONS

MODEL	WHEEL BASE	GVM	GCM
A 4X2 1124 STEEL SUSP. SWB 6 SP. MAN - FK62FHY5RFAC	4270mm	11,000kg	14,500kg
B 4X2 1124 STEEL SUSP. MWB 6 SP. MAN - FK62FKY5RFAC	4870mm	11,000kg	14,500kg
C 4X2 1124 STEEL SUSP. LWB 6 SP. MAN - FK62FLY5RFAC	5210mm	11,000kg	14,500kg
D 4X2 1124 STEEL SUSP. XLWB 6 SP. MAN - FK62FMY5RFAC	5540mm	11,000kg	14,500kg



**Call 1800 033 557**

or visit [fuso.com.au](http://fuso.com.au)

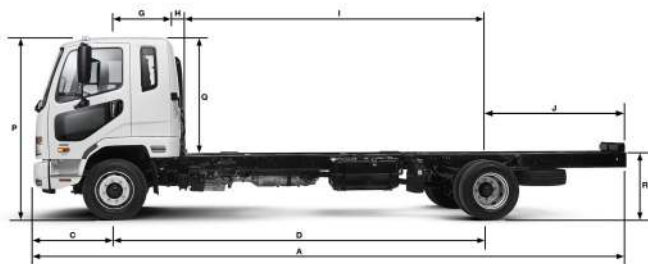

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Part Number TSF56A. Valid from 17-May-21.